




RACK END PROTECTION BARRIER - GOLF

TECHNICAL DATA SHEET

The flexible d-flexx rack end protection provides an optimal protection for racking. Thanks to the easy and fast assembly in combination with individually cut lengths, traffic routes can be separated quickly and easily from work areas or pedestrian paths. Bollards are a useful addition at the end of the traffic barriers.

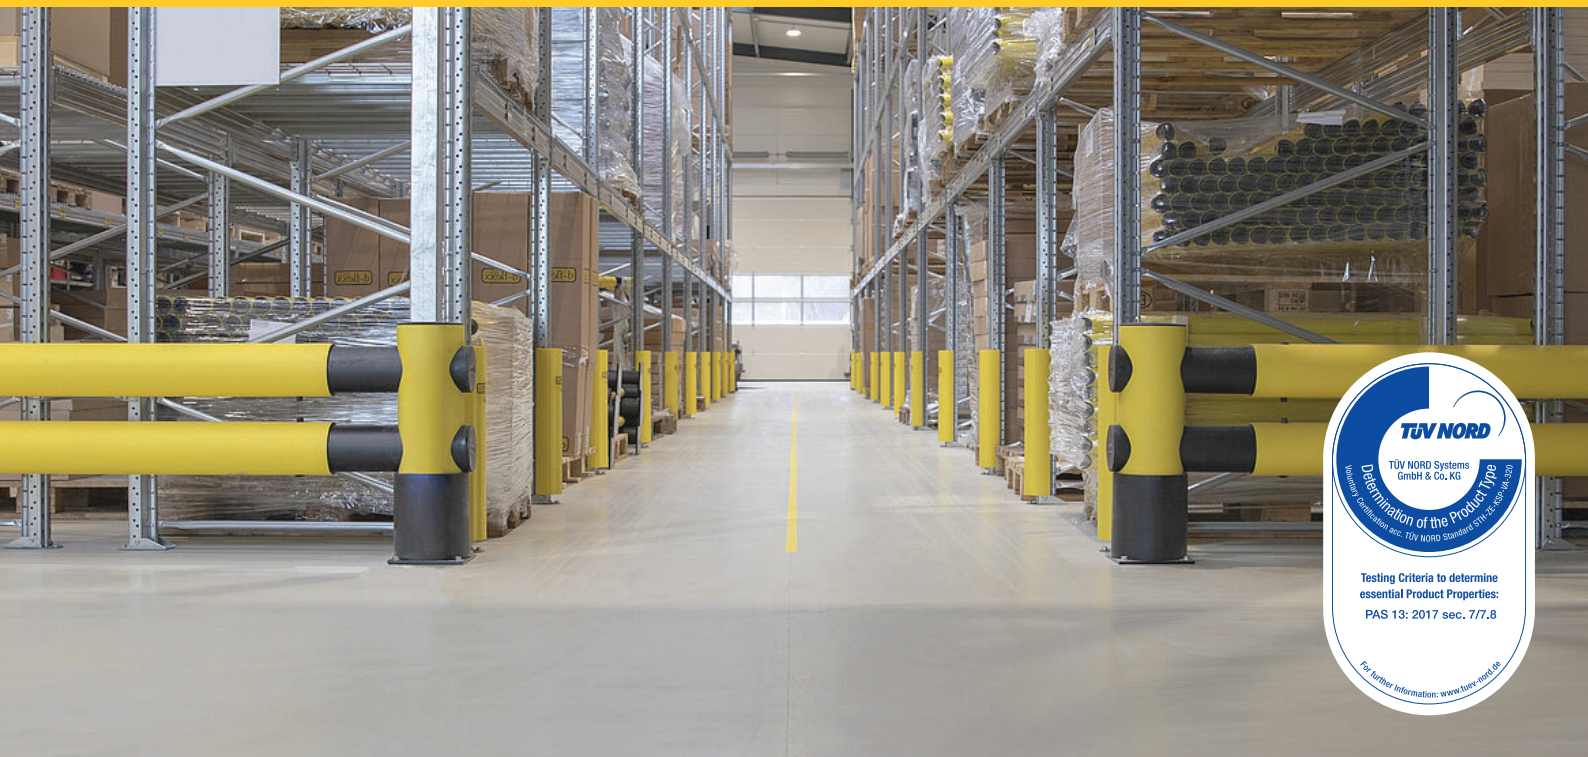

DELIVERING **SAFER** WORKPLACES

Passionate in reducing the number of incidents in the workplace with quality visual and physical safety solutions, delivered fast.



FORTIS

PHYSICAL SEGREGATION SOLUTIONS

TABLE OF CONTENTS

Art. No.	Description	Width	Weight	Page
DFRE1-2	Rack end protection, single rail	1137 mm	31,52 kg	02
DFRE1-4	Rack end protection, single rail	2538 mm	26,2 kg	02
DFRE2-2	Rack end protection, double rail	1137 mm	43 kg	03
DFRE2-4	Rack end protection, double rail	2538 mm	28,6 kg	03

TECHNICAL INFORMATION


Material properties

Operational temperature range	-40° up to + 50°
Ignition Temperature	350 - 360°C
Flash Point	350 - 360°C
Toxicity	Nontoxic
Chemical Resistance	high - ISO/TR 10358
Hygiene Seals	Non
Standard Warranty	5 years

Deflection Zone: 250mm





Impact Test	Tested to withstand force of (Joule)	Vehicle weight = equivalent (kg)	Vehicle equivalent speed (km/h)	Equivalent angle of impact	Deflection zone
DFRE1-2	8.000	5.000	7,2 km/h	90°	250 mm
DFRE1-4	7.000	2.000	5,7 km/h	90°	250 mm
DFRE2-2	11.000	5.000	7,2 km/h	90°	250 mm
DFRE2-4	13.000	2.000	5,7 km/h	90°	250 mm

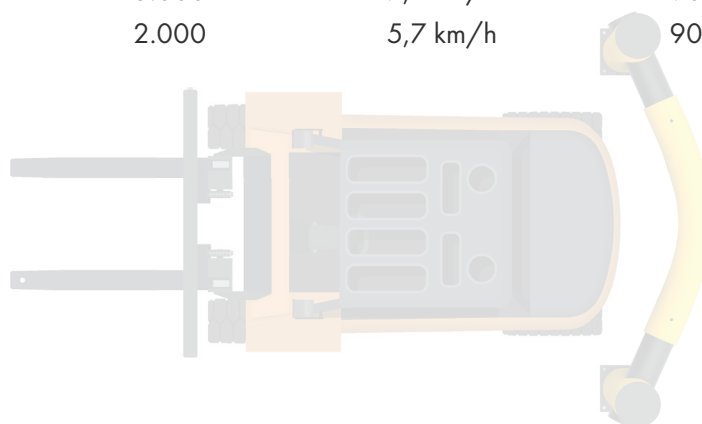


DFRE 1-2

Article description:	Rack end protection, single rail
Item number:	DFRE1-2
EAN:	4250912311350
Customs tariff number:	39269097
Width (mm):	1137
Height (mm):	515
Depth/Length (mm):	225
Installation width (mm):	1137
Width without foot plate (mm):	1137
Depth without foot plate (mm):	225
Deflection zone (mm):	250
Tested to withstand force (Joule):	8.000 J
Net weight:	31.52 kg
Material:	Polyethylene
Color:	Yellow RAL 1018 - black
Area of application:	Indoor and outdoor use
Fixing:	Fixing Material included. 8 x concrete screw M12x80

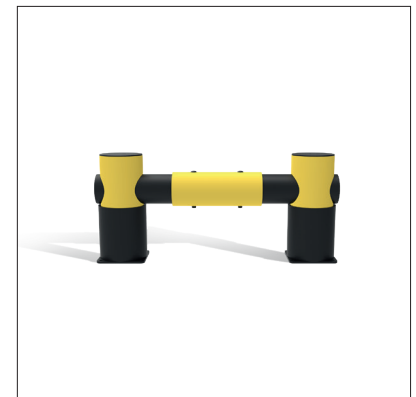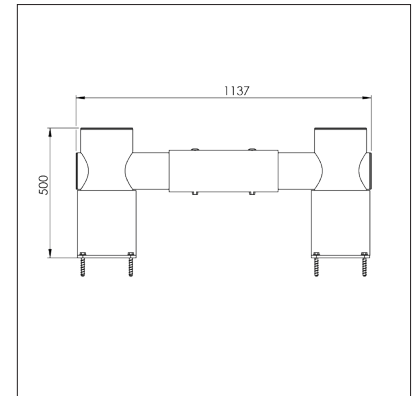


DFRE 1-4

Article description:	Rack end protection, single rail
Item number:	DFRE1-4
EAN:	4250912311367
Customs tariff number:	39269097
Width (mm):	2538
Height (mm):	500
Depth/Length (mm):	225
Installation width (mm):	2538
Width without foot plate (mm):	2538
Depth without foot plate (mm):	225
Deflection zone (mm):	250
Tested to withstand force (Joule):	7.000 J
Net weight:	26.2 kg
Material:	Polyethylene
Color:	Yellow RAL 1018 - black
Area of application:	Indoor and outdoor use
Fixing:	Fixing Material included. 8 x concrete screw M12x80

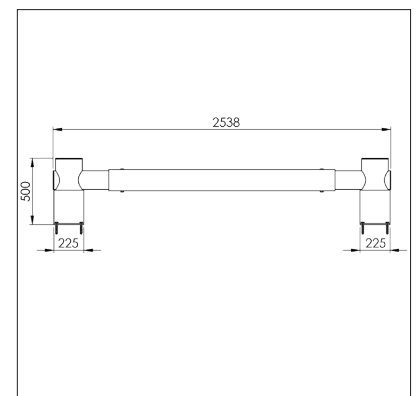



DFRE2-2

Article description:	Rack end protection, double rail
Item number:	DFRE2-2
EAN:	4250912311374
Customs tariff number:	39269097
Width (mm):	1137
Height (mm):	715
Depth/Length (mm):	225
Installation width (mm):	1137
Width without foot plate (mm):	1137
Depth without foot plate (mm):	225
Deflection zone (mm):	250
Tested to withstand force (Joule):	11.000 J
Net weight:	43 kg
Material:	Polyethylene
Color:	Yellow RAL 1018 - black
Area of application:	Indoor and outdoor use
Fixing:	Fixing Material included. 8 x concrete screw M12x80

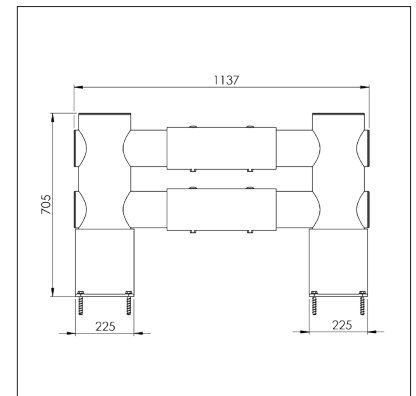

DFRE2-4

Article description:	Rack end protection, double rail
Item number:	DFRE2-4
EAN:	4250912311381
Customs tariff number:	39269097
Width (mm):	2538
Height (mm):	716
Depth/Length (mm):	225
Installation width (mm):	2538
Width without foot plate (mm):	2538
Depth without foot plate (mm):	225
Deflection zone (mm):	250
Tested to withstand force (Joule):	13.000 J
Net weight:	28.6 kg
Material:	Polyethylene
Color:	Yellow RAL 1018 - black
Area of application:	Indoor and outdoor use
Fixing:	Fixing Material included. 8 x concrete screw M12x80

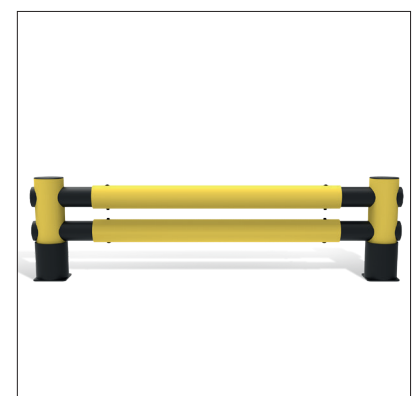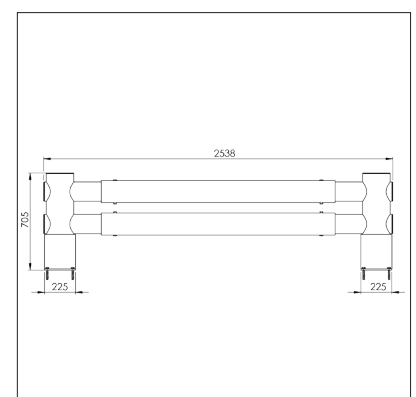

PART OF THE mhl

COMPREHENSIVE **ALL-IN-ONE** SOLUTIONS AND **SITE-SPECIFIC** RECOMMENDATIONS



**START YOUR JOURNEY
WITH US TODAY...**

- Make an enquiry
- Book a meeting
- Chat to us

☎ 0800 055 4737

✉ mail@wss-eu.com

🌐 wss-eu.com

📍 Head Office: Portsmouth, UK

📍 Ireland Office: Warrenpoint, IRE